

KOBELCOPerformance  Design

SK 85MSR

**■ Bucket capacity:****0.22–0.28 m³****■ Engine power:****53.7 kW/2,100 min⁻¹****■ Operating weight:****8,400–8,800 kg**



sk85MSR



Performance Design

SK85MSR of KOBELCO has realised a completely new value by harmonising PERFORMANCE – greater efficiency and productivity with an increased power and speed and DESIGN – operator-based operability and comfort, refusing to accept any compromises. In pursuit of unique and matchless machines which are unforgettable once you use them, KOBELCO will continue to rise to meet every challenge.

THE ULTIMATE IN SIMPLE AND ELEGANT DESIGN

Our pursuit of functional beauty and aesthetic sense produced a new interior design.

Jog dial

This jog dial integrates multiple functions to realise simple operations. Even with gloved hands, the operator can set various machine conditions without stress.

LED backlights

The switches and dials have LED backlights – they provide a bright, clear view in the dark and set a luxurious mood.







UNFORGETTABLE COMFORT

① Air suspension seat

A GRAMMER* seat is installed as standard equipment, which achieves excellent shock absorption and superior ride comfort.

*GRAMMER is trademark of GRAMMER AG. registered in Germany and other countries.



② Air conditioner blowing from the rear

Air is blown against the operator's waist and the back of their head, offering more comfortable operation.

③ Lever angles allow for comfortable operations

The operator can move the levers horizontally without twisting their wrist, which reduces the fatigue caused by the operations.



④ LED door light

The LED interior light automatically turns on when the door is opened or when the ignition is set to OFF. This ensures easy entry and exit at nighttime.



KOBELCO



04:33



SETTING MENU



PICTURE OF
CAMERA



CLOCK
SETTING



SCREEN
BRIGHTNESS



MAINTENANCE




CONSUMPTION



LANGUAGE
SELECTION



FLOW
RATE 128 l/min



AVERAGE FUEL
CONSUMPTION
OPERABLE
TIME

4 l/h

12 h



A WIDER VIEW BRINGS A WIDER RANGE OF USE

10-inch colour monitor (the largest in the industry)

The easy-to-operate menu screen facilitates reading of important information. Images from the built-in cameras can be checked on the large screen, which helps secure safety. In addition, each icon has become easy to recognise. A password is required when starting the engine for greater security.



Right and rear cameras


Images from the right camera and rear camera are displayed together on the large colour monitor. The right camera view can be selected between the straight view mode and right side view mode. In addition, the bird's-eye view mode can also be selected. As an optional setting, the eagle eye view mode can also be selected.



Screen display linked with the jog dial operation

The jog dial can be operated as desired without causing stress. Turn the jog dial to the right or left to select an item and press the dial to confirm the selection.

The right camera and rear camera (right side view mode)



The right camera and rear camera (straight view mode)




The bird's-eye view



The eagle-eye view (option)

COMPACT, YET, BIG PERFORMANCE

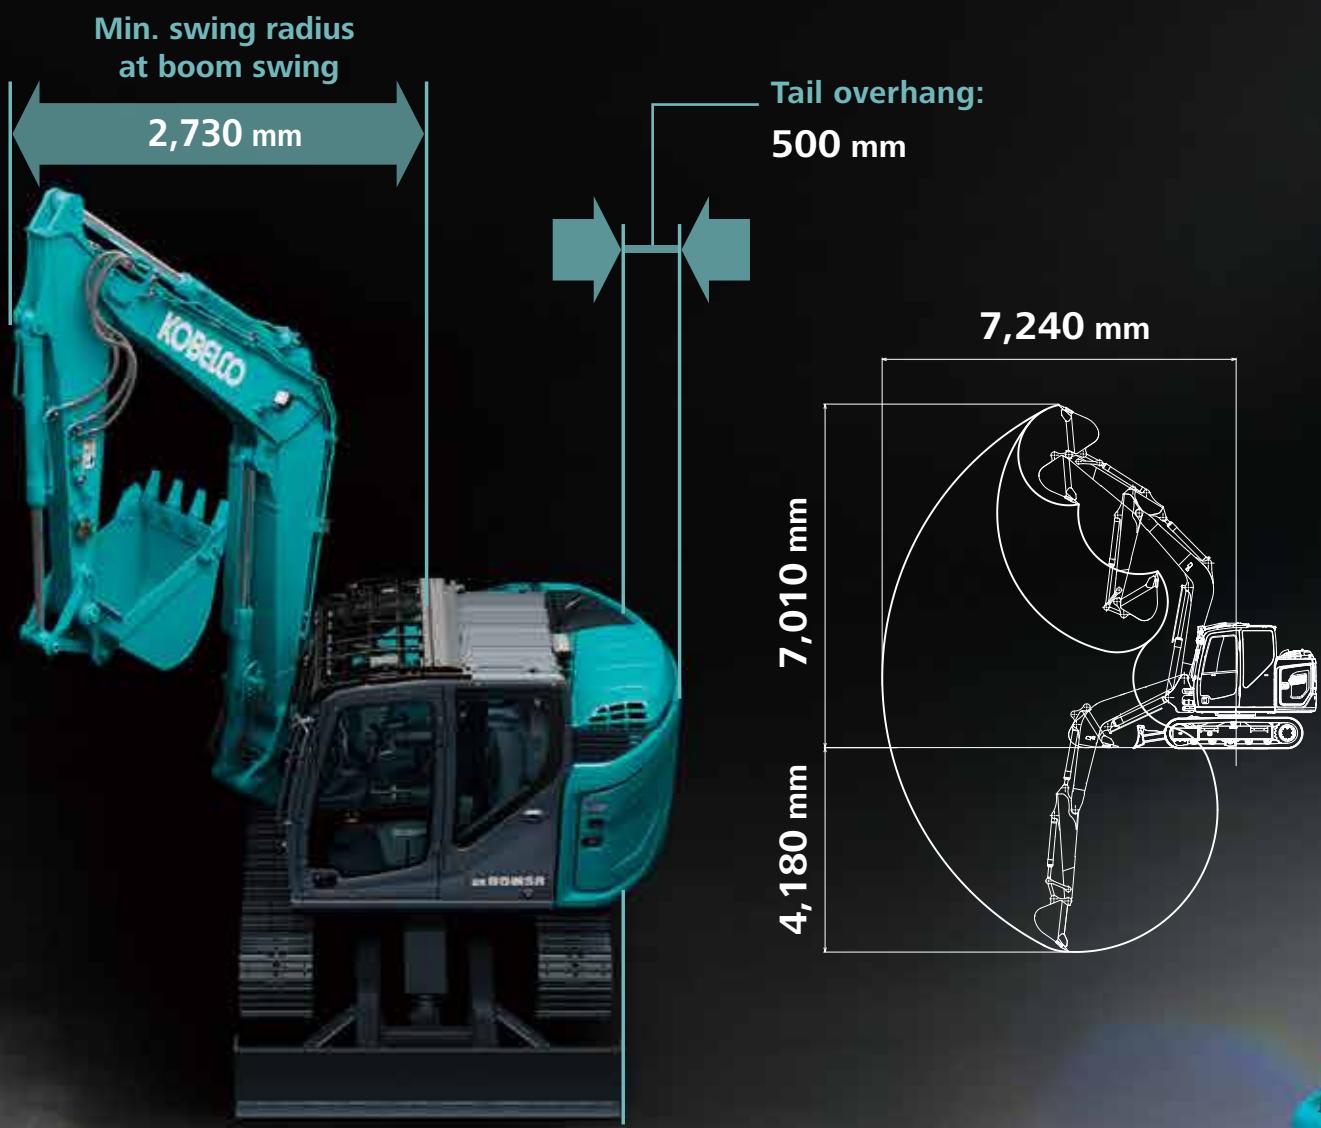

EXPERIENCING A COMPETENT PERFORMANCE

Our high-power engine complies with STAGE V emission regulations

Compared to previous models, the engine output is significantly increased, which thereby shortens the digging cycle time remarkably. It attains high performances without reducing the speed even when heavy a load is applied or when travelling on a slope.



Model: YANMAR 4TNV98CT

Engine output

Increased by 27.9%

(Compared to the SK85MSR-3E model)



»»» **Hill-climbing speed**

Increased by 22%

(Compared to the SK85MSR-3E model)

»»» **Digging cycle time Shortened by 15%**

(Compared to the SK85MSR-3E model)

Loaded boom lifting speed

Increased by 38%

(Compared to the SK85MSR-3E model)

Arm digging speed

Increased by 37%

(Compared to the SK85MSR-3E model)

GREATER MULTI-FUNCTION CAPABILITIES

Attachment mode

The flow-rate modes of the bucket, breaker, nibbler, and rotating grapple are set before delivery, which allows you to start operating immediately. Mode settings for other attachments, such as the tilt rotator, can easily be added or changed.




CONVENIENT AND SENSIBLE EQUIPMENT



Console mount

The console-integrated seat allows for comfortable operation.

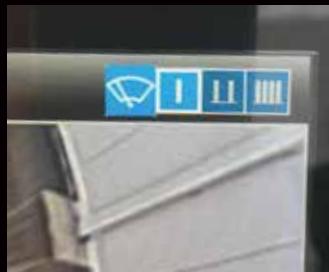

Wiper adjustment function

In addition to the intermittent wiper mode and continuous wiper mode, the one-time wiper mode was added.



USB port/12 V power outlet



Smartphone holder

You can use the holder with your smartphone connected to the USB port.



AM/FM Bluetooth® (hands-free) radio

**"Bluetooth®" is a registered trademark of the Bluetooth SIG Inc.



Openable TOP guard

The openable guard allows for easy maintenance.



Increased clearance between the upper body and the shoes



Built-in rear camera/right camera



Engine oil drain cock



Remote control fuel drain cock


Excavator Remote Monitoring System




Direct Access to Operational Status

Location Data

- Accurate location data can be obtained even from sites where communications are difficult.

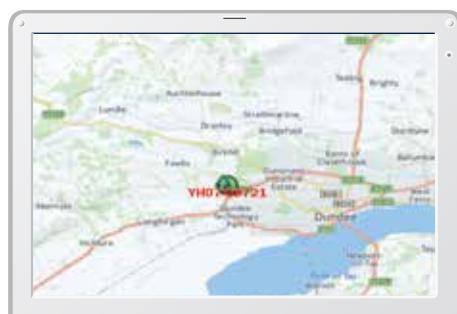

Latest location

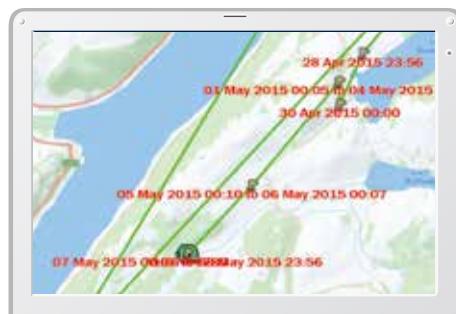


Location records



Work data


Operating Hours

- A comparison of operating times of machines at multiple locations shows which locations are busier and more profitable.
- Operating hours on site can be accurately recorded, for running time calculations needed for rental machines, etc.

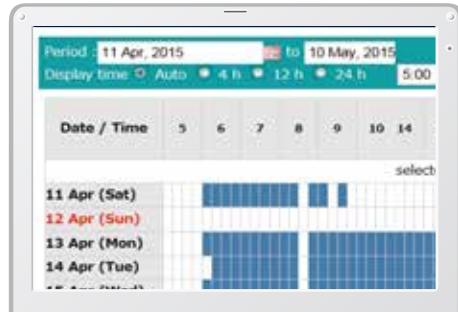

Fuel Consumption Data

- Data on fuel consumption and idling times can be used to indicate improvements in fuel consumption.

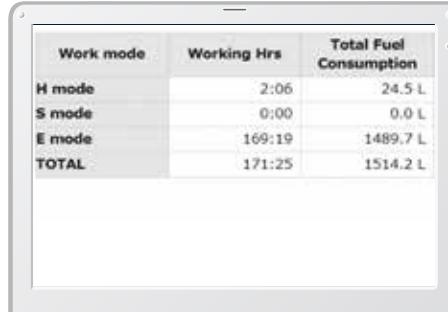

Graph of Work Content

- The graph shows how working hours are divided among different operating categories, including digging, idling, travelling and optional operations.



Maintenance Data and Warning Alerts

Machine Maintenance Data

- Provides maintenance status of separate machines operating at multiple sites.
- Maintenance data is also relayed to KOBELCO service personnel, for more efficient planning of periodic servicing.

Model	Serial No.	Hour Meter	Engine Oil
SK135SRLC-3/SK140SRL	YH07-09721	734 Hr	434
SK135SRLC-3/SK140SRL	YH07-09289	73 Hr	429
SK210LC-9	YQ13-10454	960 Hr	58
SK210LC-9	YQ13-10481	549 Hr	498
SK755R-	YT08-30374		

Maintenance

Warning Alerts

- This system warns an alert if an anomaly is sensed, preventing damage that could result in machine downtime.



Alarm messages can be received on mobile device.

Alarm Information Can Be Received through E-mail

- Alarm information or maintenance notice can be received through E-mail, using a computer or cell phone.

Security System

Engine Start Alarm

- The system can be set an alarm if the machine is operated outside designated time.

Setting Condition

Setting Condition Change

Start time 20 : 00

Release time 07 : 00

No Working Whole Day

Mon Tue Wed Thu Fri Sat Sun

Clear

Engine start alarm outside prescribed work time

Area Alarm

- It can be set an alarm if the machine is moved out of its designated area to another location.

Setting Condition

Around the current (latest) location 1 Km

Input Latitude and Longitude

Latitude1

Longitude1

Latitude2

Longitude2

Map

Release

Clear

Alarm for outside of reset area

Specifications



Engine

Model	YANMAR 4TNV98CT
Type	Four-stroke, liquid-cooled, direct injection diesel, turbo charged, stage 4 certified
No. of cylinders	4
Bore and stroke	98 mm x 110 mm
Displacement	3.318 L
Rated power output	51.5 kW/2,100 min ⁻¹ (ISO 9249: with fan) 53.7 kW/2,100 min ⁻¹ (ISO 14396: without fan)
Max. torque	292 N.m/1,365 min ⁻¹ (ISO 9249: with fan) 296 N.m/1,365 min ⁻¹ (ISO 14396: without fan)



Travel system

Travel motors	Variable displacement piston, two-speed motors
Travel brakes	Hydraulic brake
Parking brakes	Wet multiple plate
Travel shoes	39 each side
Travel speed	5.0/2.7 km/h
Drawbar pulling force	77 kN (ISO 7464)
Gradeability	58% (30°)



Cab & control

Cab	All-weather, sound-suppressed steel cab mounted on the silicon-sealed viscous mounts and equipped with a heavy, insulated floor mat
Control	Two hand levers and two foot pedals for travel
	Two hand levers for excavating and swing
	Electric rotary-type engine throttle



Boom, arm & bucket

Boom cylinders	110 mm x 916 mm
Arm cylinder	95 mm x 839 mm
Bucket cylinder	85 mm x 762 mm



Dozer blade

Dozer cylinder	145 mm x 189 mm
Dimension	2,300 mm (for 450 mm shoe) (width) x 455 mm (height)*
Working range	500 mm (up) x 500 mm (down)

*Dozer width is changed according to the shoe width difference.



Refilling capacities & lubrications

Fuel tank	120 L
Cooling system	12.8 L
Engine oil	11.8 L
Travel reduction gear	2 x 1.3 L
Swing reduction gear	1.5 L
Hydraulic oil tank	44 L tank oil level 89 L hydraulic system

Swing system

Swing motor	One fixed displacement piston motor
Brake	Hydraulic; locking automatically when the swing control lever is in the neutral position
Parking brake	Wet multiple plate
Swing speed	11.5 min ⁻¹
Tail swing radius	1,650 mm
Swing torque	17 kN.m



Attachments

Backhoe bucket and combination

	Use	Backhoe bucket	
		Standard	Narrow
Bucket capacity	ISO heaped	0.28	0.22
	Struck	0.21	0.18
Opening width	With side cutter	750	650
	Without side cutter	680	580
No. of teeth		4	4
Bucket weight	kg	210	200
Combination	1.87 m arm	◎	○
	2.13 m arm	△	◎

◎ Standard ○ Recommended △ Loading only




Working ranges

Boom	3.50 m		Unit: m
	Arm	1.87 m	2.13 m
Range			
a-Max. digging reach	7.24	7.50	
b-Max. digging reach at ground level	7.07	7.34	
c-Max. digging depth	4.18	4.44	
d-Max. digging height	7.01	7.23	
e-Max. dumping clearance	4.98	5.18	
f-Min. dumping clearance	1.95	1.70	
g-Max. vertical wall digging depth	3.42	3.75	
h-Min. swing radius	2.73	2.80	
i-Horizontal digging stroke at ground level	3.11	3.51	
j-Digging depth for 2.4 m (8') flat bottom	3.82	4.12	
Bucket capacity ISO heaped m ³	0.28	0.22	

Digging force (ISO 6015)


Arm length	1.87 m	2.13 m	Unit: kN
Bucket digging force		60.3	
Arm crowding force	37.0	33.6	

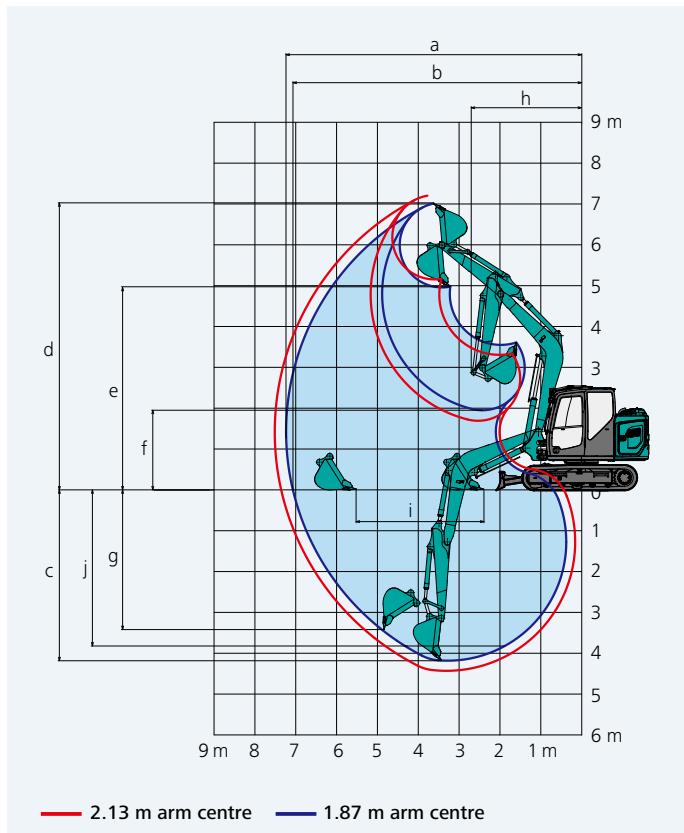

Dimensions

Boom	3.50 m		Unit: mm
Arm length	1.87 m	2.13 m	
A Overall length	6,730	6,750	
B Overall height (to top of boom)	2,400	2,550	
C Overall width	2,300**		
D Overall height (to top of cab)	2,570		
E Ground clearance of rear end*	720		
F Ground clearance*	320		
G Tail swing radius (add on counter weight)	1,650 (1,740)		
G' Distance from centre of swing to rear end	1,650		
H Tumbler distance	2,210		
I Overall length of crawler	2,830		
J Track gauge	1,850		
K Shoe width	450		
L Overall width of upper structure	2,300		
M Dozer blade (up / down)	500/500		

*Without including height of shoe lug **450 mm shoe


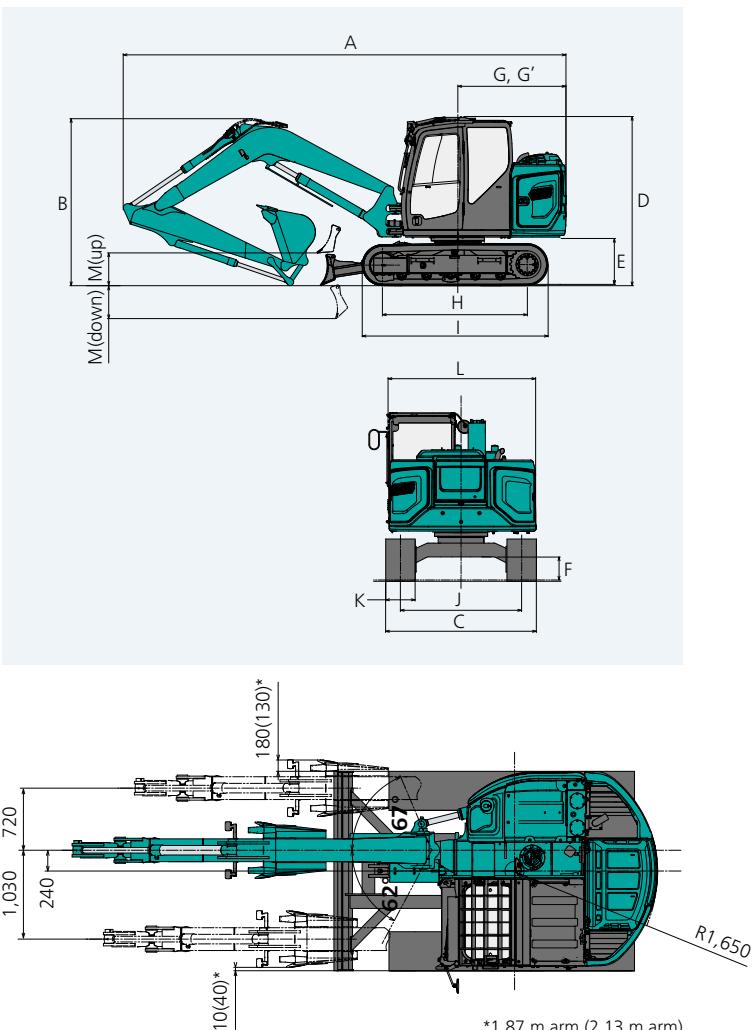


Operating weight & ground pressure

In standard trim, with standard boom, 1.87 m arm, and 0.28 m³ ISO heaped bucket

Shaped	Triple grouser shoes (even height)		Rubber shoes
Shoe width mm	600		450
Overall width of crawler mm	2,450		2,300
Ground pressure kPa	30	38	38
Operating weight kg	8,800	8,550	8,400

Lift capacities



A: Reach from swing centreline to arm top
 B: Arm top height above/below ground
 C: Lift point
 Bucket: Without bucket
 Relief valve setting: 29.4 MPa (300 kgf/cm²)

SK85MSR		Arm: 1.87 m Bucket: Without counterweight: 700 kg Shoe: 450 mm Dozer: Blade up									
A		1.5 m		3.0 m		4.5 m		6.0 m		At max. reach	
		B	Rating over front	Rating over side	Radius						
6.0 m	kg									*1,830	*1,830
4.5 m	kg					1,900	1,640			*1,420	1,280
3.0 m	kg			*3,280	2,980	1,830	1,570			1,150	1,000
1.5 m	kg					1,700	1,450	1,100	950	1,050	910
G.L.	kg			2,970	2,430	1,610	1,370			1,080	930
-1.5 m	kg	*3,950	*3,950	2,990	2,450	1,600	1,350			1,290	1,100
-3.0 m	kg			*2,300	*2,300					*1,760	*1,760
											3.64 m

SK85MSR		Arm: 1.87 m Bucket: Without counterweight: 1,050 kg + 300 kg Shoe: 450 mm Dozer: Blade up									
A		1.5 m		3.0 m		4.5 m		6.0 m		At max. reach	
		B	Rating over front	Rating over side	Radius						
6.0 m	kg									*1,830	*1,830
4.5 m	kg					*2,040	1,950			*1,420	*1,420
3.0 m	kg			*3,280	*3,280	2,170	1,880			*1,380	1,210
1.5 m	kg					2,040	1,750	1,340	1,170	1,280	1,110
G.L.	kg			3,590	2,960	1,950	1,670			1,320	1,140
-1.5 m	kg	*3,950	*3,950	3,620	2,980	1,940	1,660			1,570	1,350
-3.0 m	kg			*2,300	*2,300					*1,760	*1,760
											3.64 m

SK85MSR		Arm: 2.13 m Bucket: Without counterweight: 700 kg Shoe: 450 mm Dozer: Blade up									
A		1.5 m		3.0 m		4.5 m		6.0 m		At max. reach	
		B	Rating over front	Rating over side	Radius						
6.0 m	kg									*1,460	*1,460
4.5 m	kg					*1,860	1,660			*1,170	1,160
3.0 m	kg					1,840	1,580	1,140	990	1,070	920
1.5 m	kg					1,700	1,450	1,100	940	970	840
G.L.	kg			2,950	2,400	1,590	1,350	1,060	910	990	850
-1.5 m	kg	*3,420	*3,420	2,950	2,410	1,570	1,330			1,160	1,000
-3.0 m	kg			*2,870	2,510					*1,810	1,570
											4.13 m

SK85MSR		Arm: 2.13 m Bucket: Without counterweight: 1,050 kg Shoe: 450 mm Dozer: Blade up									
A	B	1.5 m		3.0 m		4.5 m		6.0 m		At max. reach	
											Radius
6.0 m	kg									*1,460	*1,460
4.5 m	kg					*1,860	1,810			*1,170	*1,170
3.0 m	kg					2,010	1,730	1,260	1,100	*1,130	1,020
1.5 m	kg					1,870	1,600	1,220	1,050	1,090	940
G.L.	kg			3,260	2,670	1,770	1,510	1,180	1,010	1,110	960
-1.5 m	kg	*3,420	*3,420	3,270	2,680	1,740	1,480			1,300	1,110
-3.0 m	kg			*2,870	2,780					*1,810	1,740
											4.13 m

SK85MSR		Arm: 2.13 m Bucket: Without counterweight: 700 kg + 300 kg Shoe: 450 mm Dozer: Blade up									
A	B	1.5 m		3.0 m		4.5 m		6.0 m		At max. reach	
											Radius
6.0 m	kg									*1,460	*1,460
4.5 m	kg					*1,860	1,810			*1,170	*1,170
3.0 m	kg					2,010	1,730	1,260	1,090	*1,130	1,020
1.5 m	kg					1,870	1,600	1,220	1,050	1,080	940
G.L.	kg			3,250	2,670	1,770	1,500	1,180	1,010	1,110	950
-1.5 m	kg	*3,420	*3,420	3,260	2,670	1,740	1,480			1,290	1,110
-3.0 m	kg			*2,870	2,770					*1,810	1,740
											4.13 m

SK85MSR		Arm: 2.13 m Bucket: Without counterweight: 1,050 kg + 300 kg Shoe: 450 mm Dozer: Blade up									
A	B	1.5 m		3.0 m		4.5 m		6.0 m		At max. reach	
											Radius
6.0 m	kg									*1,460	*1,460
4.5 m	kg					*1,860	*1,860			*1,170	*1,170
3.0 m	kg					*2,180	1,890	1,380	1,200	*1,130	1,130
1.5 m	kg					2,040	1,760	1,340	1,160	1,190	1,030
G.L.	kg			3,570	2,930	1,940	1,660	1,300	1,120	1,220	1,060
-1.5 m	kg	*3,420	*3,420	3,580	2,940	1,910	1,630			1,430	1,230
-3.0 m	kg			*2,870	*2,870					*1,810	*1,810
											4.13 m

Note:

1. Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
2. Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
3. Arm top defined as lift point.
4. The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Lift capacities marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.
5. Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
6. Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

STANDARD EQUIPMENT

ENGINE

- Engine, YANMAR 4TNV98CT, Diesel engine with turbocharger and intercooler, Tier IV certified
- Auto Idle Stop
- Automatic engine deceleration
- Batteries (2 x 12 V - 64 Ah)
- Starting motor (24 V - 3.5 kW), 50 amp alternator
- Engine oil pan drain cock
- Double element air cleaner

CONTROL

- Working mode selector (H-mode, S-mode and ECO-mode)
- Rotating & N&B piping (proportional hand controlled)

SWING SYSTEM & TRAVEL SYSTEM

- Swing rebound prevention system
- Straight propel system
- Two-speed travel with automatic shift down
- Sealed & lubricated track links
- 450 mm track shoes
- Grease-type track adjusters
- Automatic swing brake
- Dozer Blade

MIRRORS, LIGHTS & CAMERAS

- Rear view mirror, Eagle-eye view camera (Rear, Right, Left)
- LED work lights : 2 on boom, 1 on upper frame, 2 on rear counterweight

CAB & CONTROL

- Two control levers, pilot-operated
- Horn, electric
- Integrated left-right slide-type control box
- LED door light (interior)
- Coat hook
- Large cup holder
- Detachable two-piece floor mat
- GRAMMER* air suspension seat with heater
- Retractable seatbelt
- Headrest
- Handrails
- Intermittent windshield wiper with double-spray washer
- Skylight
- Openable top guard (ISO 10262: 1998)
- Tinted safety glass
- Pull-type front window and removable lower front window
- Easy-to-read 10-inch LCD SCREEN multi-display monitor
- Automatic air conditioner
- Emergency escape hammer
- Radio (AUX & USB & Bluetooth®)
- 12 V converter
- Hands-free telephone
- Travel alarm
- GEOSCAN
- Large footrest
- Front roll screen

OPTIONAL EQUIPMENT

- Various optional arms
- Wide range of shoes
- Front-guard protective structure (may interfere with bucket action)
- Additional counterweight (+300 kg)
- Cab top work LED lights (two lights)
- Mechanical suspension seat
- Floating dozer

- Rain visor (may interfere with bucket action)
- N&B piping (proportional hand controlled)
- Quick hitch piping
- Heavier counterweight (+350 kg)
- Additional track guide
- Multi control valve

Note: Standard and optional equipment may vary. Consult your KOBELCO dealer for specifics.

Bluetooth® is a registered trademark of the Bluetooth SIG Inc.

*GRAMMER is trademark of GRAMMER AG. registered in Germany and other countries.

Note: This catalogue may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice. Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalogue may be reproduced in any manner without notice.

KOBELCO CONSTRUCTION MACHINERY CO., LTD.

Tokyo, JAPAN

www.kobelcocm-global.com



Enquiries To: